


MEMBRANE DISPENSER

FOR AN EASY AND
SAFE WORKFLOW

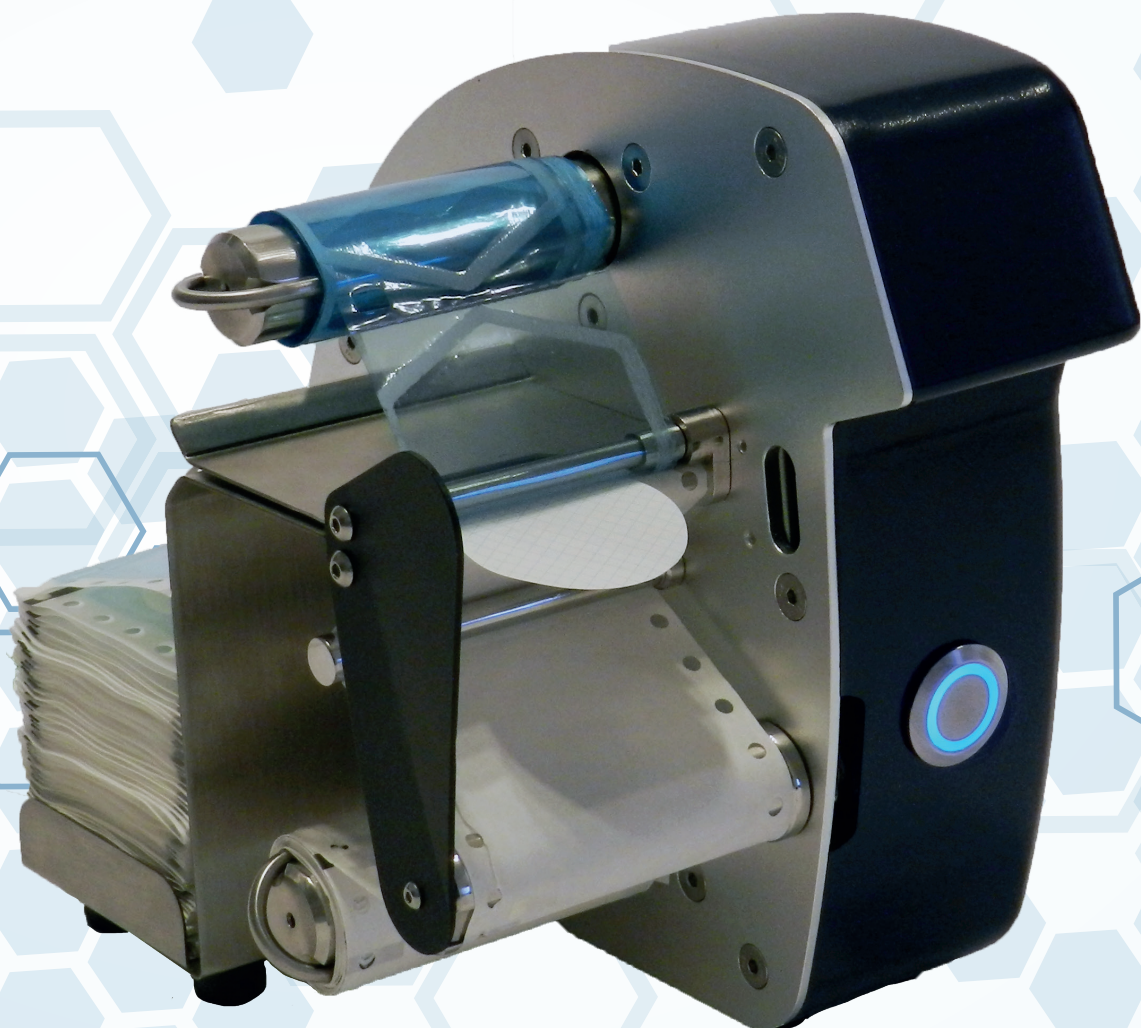

 Berrytec[®]

BERRYTEC® MEMBRANE DISPENSER

COMFORTABLE DISPENSING WITH THREE DIFFERENT RELEASE MODES

Thanks to its compact design, our dispenser can be used anywhere without taking up much space. Due to the materials used, the dispenser can also be installed in your laminar flow. Our membrane dispenser offers the simplest and most flexible method of dispensing membrane filters.

The Dispenser has three different comfortable release modes:

- Sensor (our sensor triggers when you touch a small rectangular window with your tweezers or your finger to prevent accidental hand-trigger)
- Foot switch (option) or
- Button



SIMPLE WORKFLOWS

With our endless membrane filter packs with 150 membrane filters per pack, you can easily perform a large number of tests in a row before you have to use a new pack.

With its low weight it is easy to move. Our specially designed membrane filter belt is easy to insert and can be changed quickly if necessary.

Our filters also fit into devices from other manufacturers, please ask us for details.

TECHNICAL DATA

Primary product type	Dispenser
dispensing speed	0.5 sec.
weight category	2.4 kg
mains voltage	100 – 230 V
network frequency	50-60 Hz
dimensions (HxWxD)	233 × 172 × 230

WE OFFER A WIDE RANGE OF GRID MEMBRANES


1500300	MCE membrane filter white 47mm, 0,22µm sterile	150/pack
1500010	MCE membrane filter white 47mm, 0,45µm sterile	150/pack
1500310	MCE membrane filter white 50mm, 0,22µm sterile	150/pack
1500020	MCE membrane filter white 50mm, 0,45µm sterile	150/pack
1500320	MCE Membrane Filter black 47mm, 0,22µm sterile	150/pack
1500330	MCE Membrane Filter black 47mm, 0,45µm sterile	150/pack
1500340	MCE Membrane Filter black 50mm, 0,22µm sterile	150/pack
1500350	MCE membrane filter black 50mm, 0,45µm sterile	150/pack
1510021	Filter funnel 100ml, sterile	10/pack
1510022	Filter funnel 250ml, sterile	10/pack

Other types on request

SUITABLE FILTRATION BARS FOR DIRECT SUCTION VIA OUR LIQUID- AND VACUUM PUMP

1510030	Stainless steel filter strip, with 3 positions, stainless steel Frits and shut-off valves made of PTFE
1510060	Stainless steel filter strip, with 6 positions, stainless steel Frits and shut-off valves made of PTFE
1510015	Berrytec direct flow suction pump, flow rate 3,8-4,0Ltr./min, with hose olives 10-12mm, weight 1,7kg, 110-240V/50-60Hz
1201642	Membrandispenser 110-240V/50-60Hz



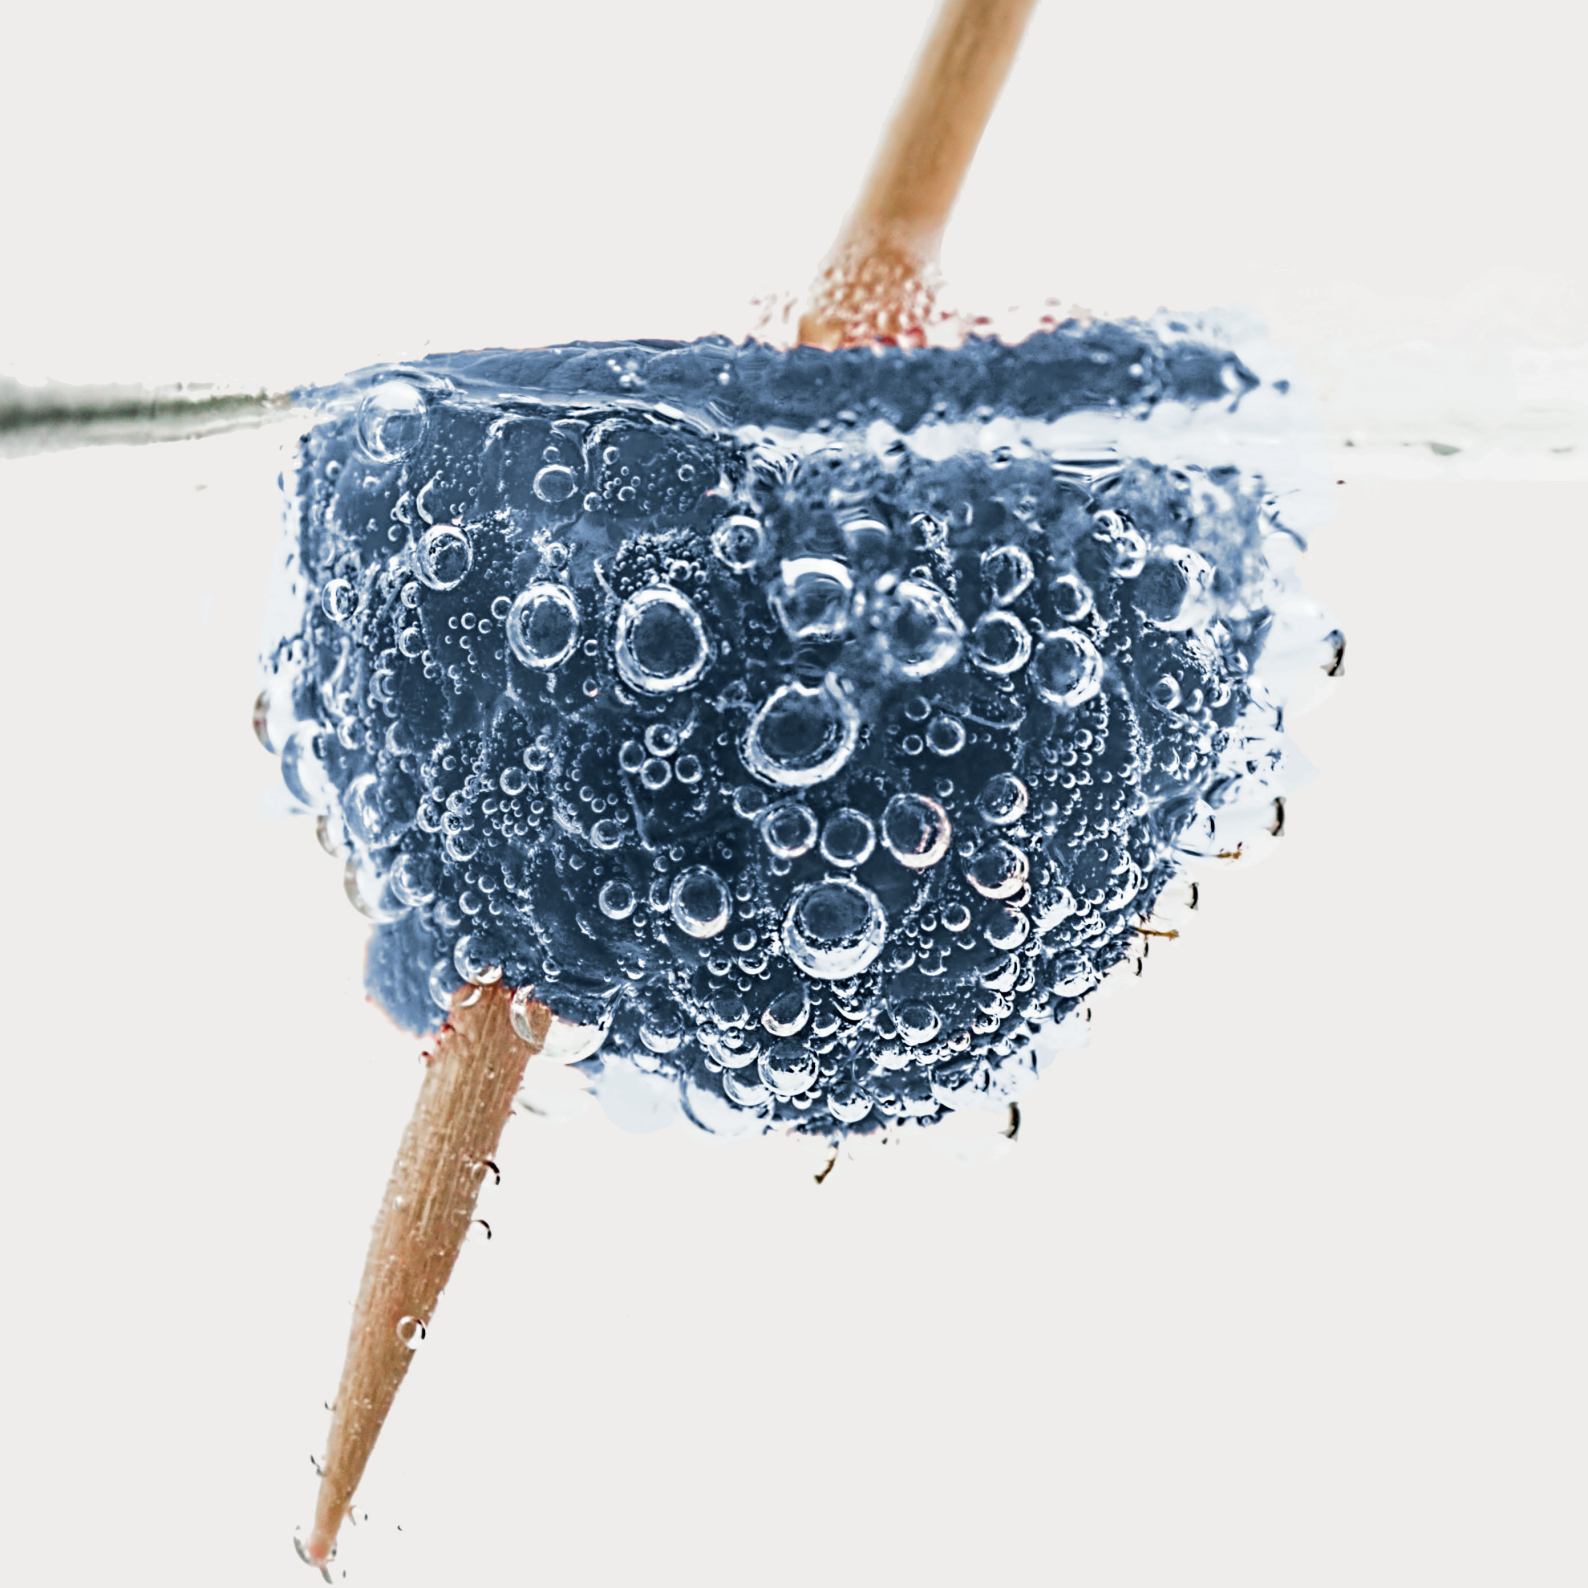

Berrytec®

Berrytec GmbH
Schwablweg 15
85630 Harthausen
Germany

kontakt@berrytec.eu
Tel: +49 8106/3790-22
www.berrytec.eu